


Product Datasheet

d² Dura Platform 40 Tactile Panel

Product Description




d² Dura Platform structural platform panels are designed for long-life, high-performance use in both new-build rail platforms and refurbishment projects. Their advanced pultruded composite construction delivers exceptional strength and durability while significantly reducing embodied carbon compared to traditional materials. Engineered to be lightweight and corrosion-resistant, the panels minimise installation, maintenance and transport costs, and can be deployed quickly on site without compromising safety or structural integrity.


Product Details

This product is cut to length based on project requirements. The information below reflects the standard length.


Product	Length (mm)	Width (mm)	Height (mm)	Colours / Product Codes	Product Weight (kg)	Weight (kg/sqm)
Tactile Panel	2995	700	40	Tri-Tone (DRP0823)	60.78	28.99
Cover Plate		100	6	Yellow (DRP0302) Tri-Tone (DRP0801) White (DRP0305)	3.93	13.12

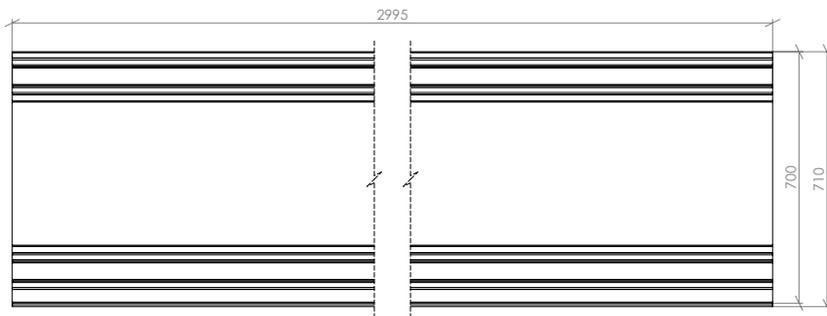


PLAN VIEW

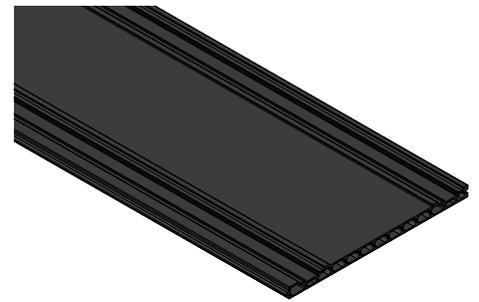


ISOMETRIC VIEW



FRONT VIEW



SIDE VIEW
SCALE 1 : 8

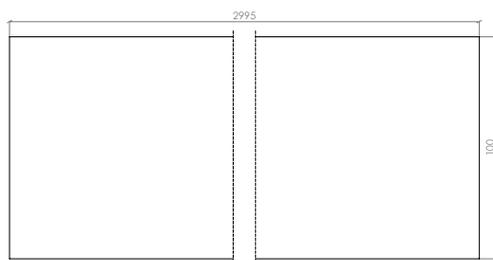


PLAN VIEW



SIDE VIEW



FRONT VIEW



ISOMETRIC VIEW

Product Applications

Common applications for d² Dura Platform Type 40 include station platforms and heavy duty walkways.

Packaging

Please see the below table for relevant packaging information for d² Dura Platform Type 40. The Cover Plates are delivered separately.

Packaging	Product Information
Maximum Products Per Pallet	10
Pallet Dimensions (mm)	3000 x 700 x 550
Pallet Weight (kg)	627kg

Colours

Please see below for our d² Dura Slab RAL colours.

Dura Colours	RAL Number
Dark Grey ●	7043
Yellow ●	1012
White ○	9010

Test Performance Overview

For more information please refer the Technical Installation Manual or speak to your Dura Composites Representative.

Anti-Slip Resistance	Fire Resistance		Load Capacity	UV Fade Resistance
BS 7976-2:2002+A1:2013 4S Slider Pendulum Test	BS 476-20:1987+AC:2014 Part 20 + 21	BS EN 13501-1	BS 4592	ISO 492-2 (Xenon Arc 5000 hours)
PTV: 75 (dry)*, 63 (wet)*	39 minutes (requirement 20 mins)	Bfl s1	Compliant	Pass

*Maintains 95% of slip resistance after 1.1 million footfalls.

Material

Glass Reinforced Polymer (GRP) Pultruded d² Dura Platform Profiles are manufactured by combining resins with pure glassfibre reinforcement. They are formed and cured in a continuous process creating a product of extraordinary strength and resilience d² Dura Platform is resistant against a wide range of chemicals and temperature spectrums. Material samples are available on request, along with a copy of our chemical resistance data.

Safety Information

It is advisable to undertake a risk assessment, with particular focus on manual handling procedures. Wear appropriate gloves and coveralls to shield skin from abrasions. If shaping the product, it is essential to factor in the potential production of dust. To mitigate this, it is vital to either suppress the dust at source or employ effective extraction methods. We strongly recommend the use of appropriate respiratory protective equipment (RPE), specifically filtering facepiece class 3 (FFP3) masks, alongside adequate eye protection to guard against dust.

Recyclability

Return to manufacturer for repurposing or downcycle.

Sustainability

The embodied carbon for A1-A3 (production stage) as defined in BS EN 15804 is 3.13kg CO₂e.

Warranty

25 year limited warranty available with an expected 60+ year design life. Please register your product with us within 30 days of your invoice date. Visit www.duracomposites.com/warranty.