


Environmental Product Declaration



d² Dura Slab Type 45



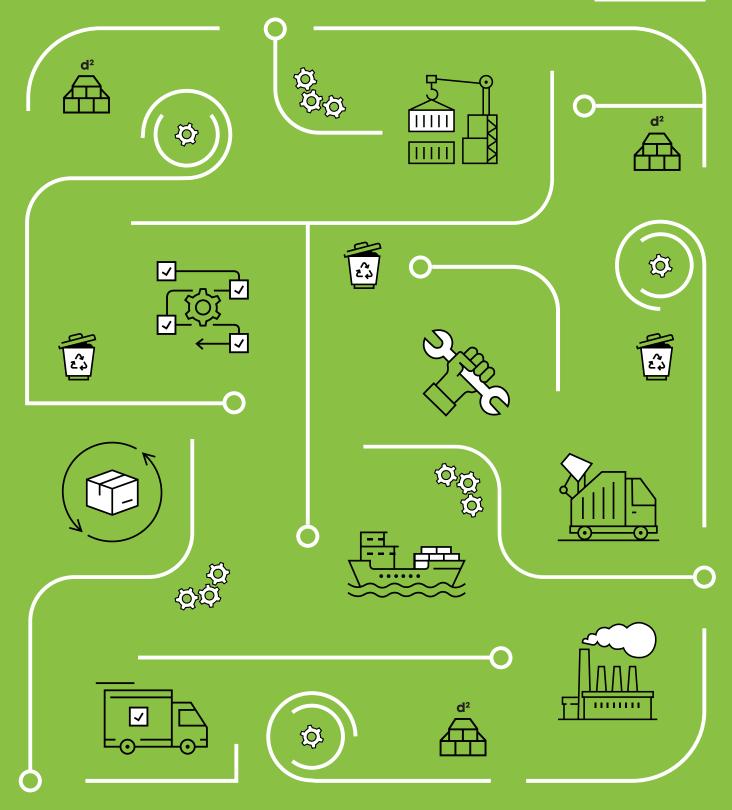

d² Dura Slab Type 45

Environmental Product Declaration | Type: Self-Declared



This covers all varients of d² Dura Slab Type 45.

This is an ISO 14021 Type II EPD generated from a Life Cycle Assessment (LCA) performed using One Click LCA.

The results are a variant of a fully verified and published parent EPD and follow the Product Category Rules of EPD Hub Core PCR Version 1.2 (24 March 2025) and EN 15804+A2.

Global Warming Potential (GWP)

The GWP quantifies a product's contribution towards global warming and is sometimes referred to as its carbon footprint or embodied carbon.

Declared Unit		Mass of Declared L	Jnit	GWP Total A	1-A3	GWP Fossil A1-A3			
1	m²	26.0	kg	103.0	kg CO2e	101.0	kg CO2e		



Product Information

Product Name	d ² Dura Slab Closed Lap Joint Type 45								
Product Description	Our Glass Reinforced Polymer (GRP) Dura Slab panels offer a low-maintenance, durable and simple-to-install composite alternative to heavy & cumbersome concrete flooring or short-life Plywood. With an innovative design that can include either manual lifting eyes or mechanical lifting arms, Dura Slab has an excellent strength-to-weight ratio, and its lightweight nature means routine inspections of the substructure can be made easily. Applications for pultruded Dura Slab include trench and gully covers, industrial flooring, work platforms, tank covers, drawpit covers, commercial decking, landings, bridge decking and mezzanine flooring. This EPD covers d² Dura Slab Closed Lap Joint Type 45 with a gritted surface finish. This slab has a thickness of 45mm and standard dimensions of 725x3660mm, although bespoke sizes may be possible, and is available in Dark Grey and Yellow; this EPD covers all colour and size where applicable. The mass used for these slabs is 26kg/m².								
Manufacturer	Dura Composites Ltd								
Address	Dura House, Telford Road, Clacton-On-Sea, Essex, UK, CO15 4LP								
About The Manufacturer	Dura Composites designs low-carbon GRP and aluminium walkway systems through its award-winning d² range. Serving industrial, rail, marine and architectural sectors, our products combine structural integrity with verified sustainability. Backed by three King's Awards for Enterprise, EPDs, fire compliance and Scope 3 data, Dura is globally recognised for innovation and trusted delivery.								
Parent EPD Number	HUB-1150								
Place of Production	China, UK								
Period for Data	2022								






System Boundary

The LCA for this product has been performed for the following system boundary, the results for A1-A3 are provided in this EPD.

PRODUCT STAGE			CONSTR	USE STAGE							END OF LIFE STAGE				BEYOND THE SYSTEM BOUNDARY		
A1	A2	А3	A4	A5	B1	B2	В3	B4	B5	В6	В7	C1	C2	C3	C4	D	
x	x	x	x	MND	Modules Not Declared							x	х	x	x	x	
Raw Materials	Transport To Site	Manufacturing	Transport	Construction	Use	Maintenance	Repair	Replacement	Refurbishment	Operational Energy	Operational Water	Deconstruction	Transport	Waste Processing	Disposal	Reuse, Recovery & Recycling	

Scope of Assessment

The results have a cradle-to-gate scope, comprising raw materials extraction and supply (A1), transport (A2) and manufacturing (A3). The yellow highlights indicate the stages Dura Composites is involved in throughout the journey of the product.

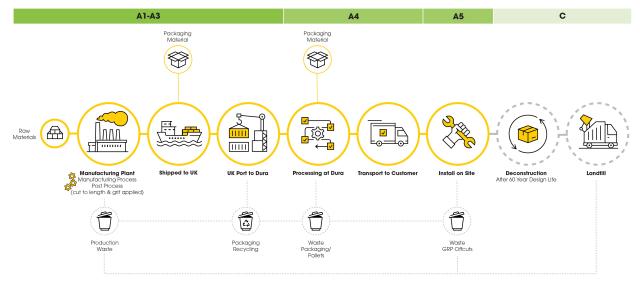

Parent EPDs

The parent EPD used to generate this product variant has been third-party verified through EPD Hub. To access our independently verified EPDs, scan the QR code or visit www.duracomposites.com/epd-reports.

